


Podkładka kontaktowa podstawowa TYP-M / Conical knurled locking washers medium type

Norma
Standart **NFE 25-511L**

Zakres / Range $\emptyset 3,1 \div \emptyset 12,4$

Zakres twardości / Hardness range -

Materiał / Material Stal, Stal nierdzewna
Steel, stainless steel

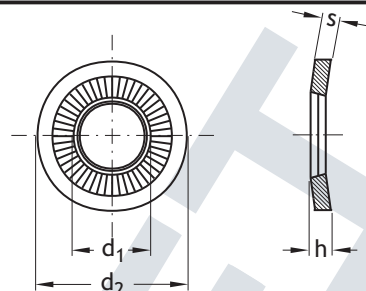

Pod gwint		M 3	M 4	M 5	M 6
d ₁	MIN	3,1	4,1	5,1	6,1
	MAX	3,35	4,4	5,4	6,4
d ₂	MIN	9,65	13,65	15,65	17,65
	MAX	10,35	14,35	16,35	18,35
s _{nom}	MIN	0,57	0,96	1,16	1,36
	MAX	0,63	1,04	1,24	1,44
h _{max}	MIN	0,95	1,4	1,7	2,10
	MAX	1,25	1,8	2,1	2,5

Pod gwint		M 8	M 10	M 12
d ₁	MIN	8,2	10,2	12,4
	MAX	8,56	10,56	12,83
d ₂	MIN	21,58	26,58	31,5
	MAX	22,42	27,42	32,5
s _{nom}	MIN	1,55	1,75	1,75
	MAX	1,65	1,85	2,05
h _{max}	MIN	2,2	2,6	3,1
	MAX	2,7	3,1	3,6

Przykład oznaczania podkładki kontaktowej forma L o średnicy nominalnej = 10mm

Podkładka kontaktowa NFE 25-511- L -10

Example designation of conical knurled locking washers, Form L, nominal diameter = 10mm

Contact washer - NFE 25-511- L - 10

1/1

